




MILOS

Trusses

User manual

Part 1: General instructions

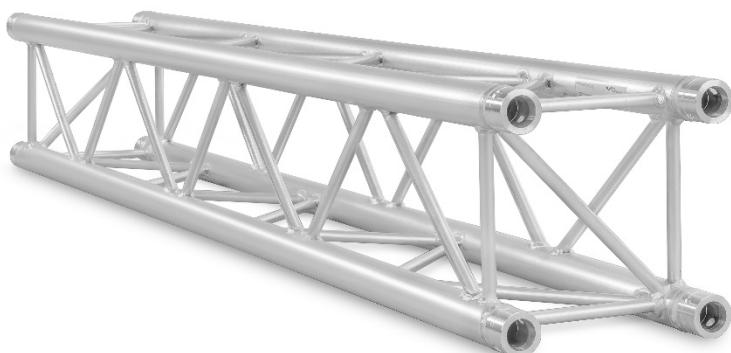

Original instructions

DN00126 Issue 2

November 2023



Manufacturer:

Area Four Industries Česko s.r.o.

Spindlerova 286

413 01 Roudnice nad Labem

Czech Republic

T +420 416 810 800

info@milos.cz

We have made every effort to ensure the accuracy of this manual. No liability will be accepted for errors. We reserve the right to change or alter our products or manuals without prior notice.

No part of this manual may be reproduced in any form or by any means without prior written permission.

If you have a warranty claim, malfunction or spare part inquiry, contact your point of sale or the manufacturer.

If you have comments or improvement ideas for this document, please contact us by using the e-mail address found on the back cover of the document. All comments and ideas will be carefully considered in the future development of the product or this document.

Contents

1	Introduction.....	5
1.1	About this product.....	5
1.2	Related information.....	5
1.3	About this manual.....	5
1.4	Terminology.....	6
1.5	Standards.....	9
2	Safety	9
2.1	Electrical safety.....	10
2.2	Personal protection equipment.....	10
3	Limitations of use	11
3.1	Load charts.....	11
3.2	Load reduction factor for repetitive use	11
3.3	Compatibility with other products	12
3.4	Environmental influences.....	12
4	Transport, handling and storage	13
5	Identification	13
6	Technical specifications	14
7	Load capacity	14
8	Approved accessories.....	14
9	Coatings and surface treatments.....	14
10	Slinging methods	14
10.1	Recommended slinging methods.....	16
11	Assembly and disassembly.....	17
11.1	Safety when assembling and disassembling.....	17
11.2	Before you start	18
11.3	Required tools	19
11.4	Torque	19
11.5	Assembling a truss	20
11.6	Assembly instructions for truss circles	20
11.7	Attaching a load	21
11.8	Disassembling a truss	23
12	Maintenance	23
13	Inspection.....	24
13.1	Inspection levels.....	24
13.2	Inspection frequency	24
13.3	Records	25
14	Discard criteria.....	25

14.1	Overview of discard criteria.....	26
14.2	General criteria.....	27
14.3	Geometry of the truss	27
14.4	Main chords	28
14.5	Diagonals and end braces.....	29
14.6	Connectors.....	30
14.7	Connecting hardware	30
15	Warranty	31
16	Certificates.....	32
16.1	CE Declaration of Conformity	32
16.2	CE Declaration of Performance	33

Change history

Issue	Date	Changes
1	July 2019	First issue.
2	November 2023	Second issue.

+

1 Introduction

This manual is intended for truss owners, providers, skilled riggers and any person who has been trained in working safely with trusses.

This manual is Part 1 of the User Manual. The User Manual consists of the following parts:

- *Part 1: General instructions*
- *Part 2: Product-specific instructions*

This manual must be read in conjunction with *Part 2: Product-specific instructions* of the User Manual. If there are discrepancies between *Part 1* and *Part 2*, the information given in *Part 2* is the information that applies to the product and overrides the information given in *Part 1*.

This manual assumes that you have been trained or work under the control of a competent or qualified person who has been trained in safety and assembly.

1.1 About this product

MILOS trusses are structural modules designed to be repeatedly assembled and disassembled to carry loads in temporary or permanent installations. Depending on the application, MILOS trusses can be referred to as lifting accessories or construction products. For information on the related standards, see Chapter 1.5.

We have paid special attention to product safety when designing the product.

The manufacturer is not liable for indirect consequential damage and financial loss. The manufacturer shall not be liable for any changes made to the product nor for any damage resulting from such changes.

1.2 Related information

For more information on the product, see www.milossystems.com/products/truss/.

1.3 About this manual

Before working with the product, read this manual carefully and pay attention to the information provided. Use this manual to familiarise yourself with the product, its proper use and safety regulations.

1.3.1 Safety conventions



Indicates a hazardous situation, which, if not avoided, will result in death or serious injury. This signal word is limited to the most extreme situations.



Indicates a hazardous situation, which, if not avoided, could result in death or serious injury.



Indicates a hazardous situation, which, if not avoided, could result in minor or moderate injury.



Indicates information considered important but not hazard-related.

1.4 Terminology

Trusses and truss modules are hereinafter referred to by the term "truss".

Term	Definition
abrasion	Loss of material due to wear.
bent member	A component or assembly that has permanent deviation from the intended centre line.
BM8 connector	A BM8 connector is a type of connector that has the following parts: "male connector", "female connector", "conical truss pin", "rubber washer", "washer" and "nut". See Figure 21.
cell clamp	A device for supporting objects or fastening them together.
competent person	A person who is capable of identifying existing and predictable hazards in the workplace and who is authorised to take prompt corrective measures to eliminate them.
components	Parts of a whole.
conical connector	A conical connector is a type of connector that has the following parts: "male connector", "female connector", "conical truss pin" and "R-clip". See Figure 22.
conical truss pin	A pin used with a conical connector. See Figure 2.
connecting hardware	Connecting components such as straight pins and conical pins, bolts, washers and R-clips.
connection	A connector used to connect two trusses together. There are two kinds of connectors: conical connector and pin-fork connector. See Figure 2 to Figure 3.
connector	A part of a connection
crack	A crevice type of discontinuity in a material.
cross brace	An element of a truss module that, different from an end brace, vertically or horizontally connects the main chords and is at a 90-degree angle to the main chords.
diagonal	An element of a truss module that is not at a 90-degree angle to the main chords.
duo truss	Truss, consisting of two belt tubes, arranged vertically one above the other.
end brace	An element of a truss module that is located at the end of the truss module, directly after the connector, at a 90-degree angle to the main chords.
female connector	A part of a conical connector. See Figure 2.
female fork connector	A part of a pin-fork connector. See Figure 3.
identification sticker	A sticker on the product on which several pieces of information about the product can be found.
internal diagonal	An element of a rectangular or square truss that connects diagonally the main chords at a 90-degree angle to the main chords.
main chord	An element of a truss that carries the forces associated with bending moments, axial forces, or combination of them.
male connector	A part of a conical connector. See Figure 2.
male fork connector	A part of a pin-fork connector. See Figure 3.
member	See "truss member".
node point	A location where the centre line of the main chord intersects with the centre line of the diagonals or end braces.
ovalisation	Deformation of a circular pipe cross-section into an oval, measurable by the deviation of two outer diameters measured at a 90-degree angle to each other.
pin-fork connector	Used for connecting trusses. See Figure 3.

pin hole	A hole in the connector that accommodates a conical or straight truss pin.
qualified person	A person who, by possession of a recognised degree or certificate of professional standing, or who by extensive knowledge, training and experience, has successfully demonstrated the ability to solve problems relating to the subject matter or work. A qualified person supervises the competent persons. See "competent person".
R-clip	A clip used for securing a truss pin or clevis pin, for example. See Figure 2 and Figure 3.
repetitive use	Assembling and disassembling the same modules or assemblies on multiple occasions.
shall	Indicates that a rule is mandatory and must be followed.
should	Indicates that a rule is a recommendation, the advisability of which depends on the facts and conditions in each situation.
single-span girder	A single truss module or a composition of several connected truss modules, supported at the both ends of the span.
straight truss pin	A pin used with a pin-fork connector. See Figure 3.
truss member	A part of the truss module.
truss pin	A pin used for connecting trusses. See Figure 2 and Figure 3.
truss structure	An assembly made of truss modules.
truss module	Lattice structure intended to be used on its own or in combination with other modules.
user	A person or a company who assembles or uses modules or systems.

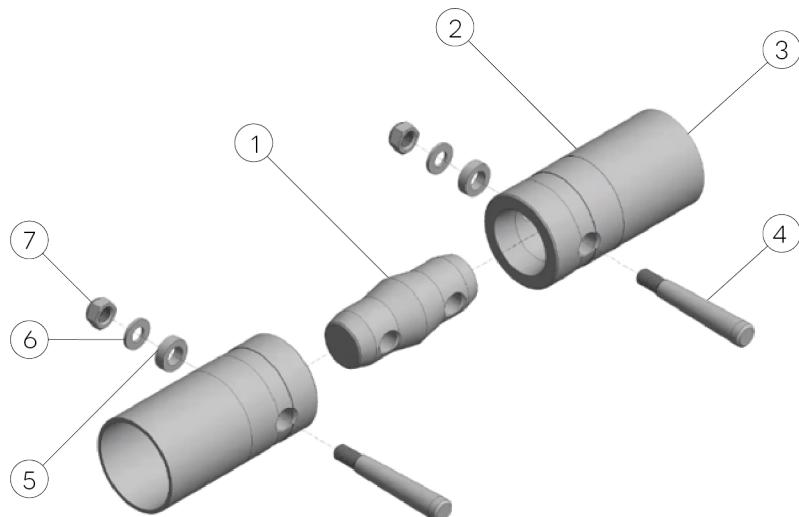


Figure 1: BM8 connection

- 1 Male connector
- 2 Female connector
- 3 Main chord
- 4 Conical truss pin
- 5 Rubber washer
- 6 Washer
- 7 Nut

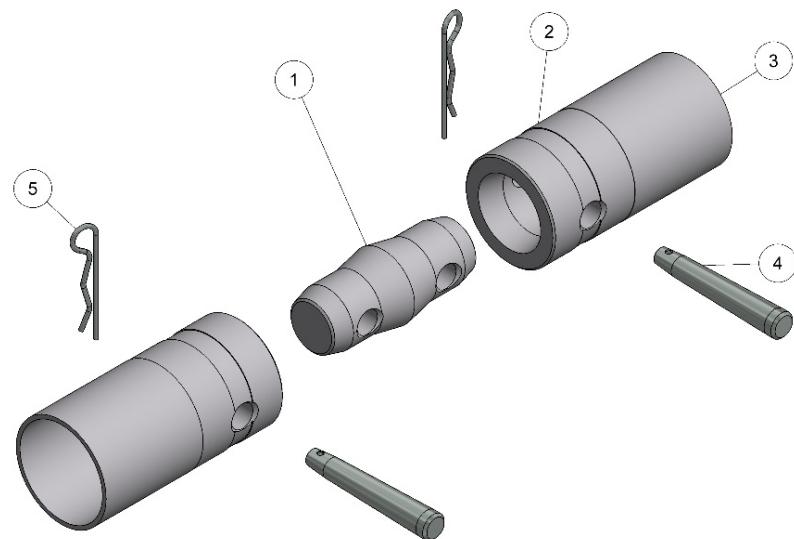


Figure 2: Conical connection

- 1 Male connector
- 2 Female connector
- 3 Main chord
- 4 Conical truss pin
- 5 R-clip

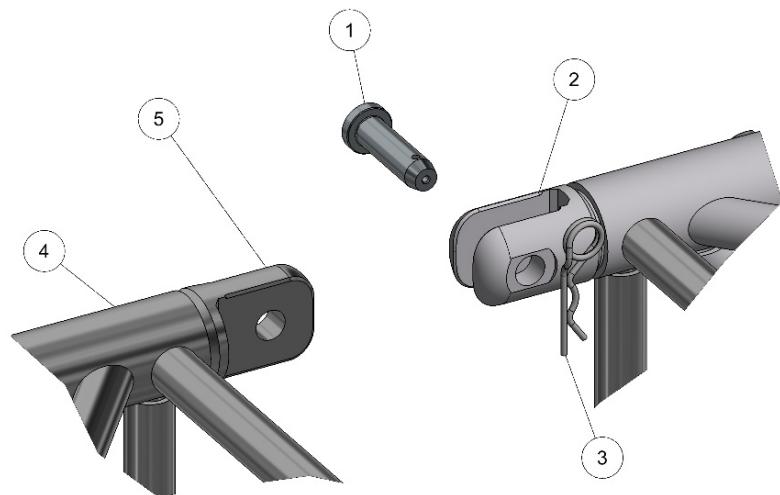


Figure 3: Pin-fork connection

- 1 Straight truss pin
- 2 Female fork connector
- 3 R-clip
- 4 Main chord
- 5 Male fork connector

1.5 Standards

If used as lifting accessories, trusses are subject to the European Machinery Directive 2006/42/EC. If used as an integral part of a permanent structure, trusses are subject to the European Construction Product Regulation 305/2011/EC.

For information on the declarations of conformity and performance, see Chapter 16.

NOTICE

It is the sole responsibility of the owner or provider to check with the local authorities if the legislation used by MILOS is acceptable in the country of use.

For manufacturing, the following standards are considered:

- 2006/42/EC, European Machinery Directive
- 305/2011/EC, European Construction Product Regulation
- DIN EN 1990, Eurocode 0: Basis of structural design
- DIN EN 1991, Eurocode 1: Actions on structures
- DIN EN 1993, Eurocode 3: Design of steel structures
- DIN EN 1999, Eurocode 9: Design of aluminium structures
- EN 1090-1, Execution of steel structures and aluminium structures - Part 1: Requirements for conformity assessment of structural components
- EN 1090-3, Execution of steel structures and aluminium structures - Part 3: Technical requirements for aluminium structures
- ANSI E1.2-2006, Entertainment Technology: Design, Manufacture and Use of Aluminium Trusses and Towers
- EN 17115, Entertainment technology - Specifications for design and manufacture of aluminium and steel trusses
- EN ISO 10042-2006, Arc welded joints in aluminium and its weldable alloys - Guidance on quality levels for imperfections
- EN ISO 3834-1 & 3, Quality requirements for welding - Fusion welding of metallic materials - Part 1: Guidelines for selection and use Part 3: Standard quality requirements
- EN 754 (all parts), Aluminium and aluminium alloys - Cold drawn rod/bar and tube
- EN 755 (all parts), Aluminium and aluminium alloys - Extruded rod/bar, tube and profiles
- EN 515:1993, Aluminium and aluminium alloys - Wrought products - Temper designations
- EN 573 (all parts), Aluminium and aluminium alloys - Chemical composition and form of wrought products
- EN 10204:2004, Metallic products - Types of inspection documents

2 Safety

NOTICE

Read these safety texts carefully before working with the product.

NOTICE

Make sure manuals are available at all times for all users and employees.

Truss data published before 2015/2016 was based on calculations according to the German DIN 4113 standard, while truss data published after this date are based on the Eurocode EN1999. Due to a different safety principle in each standard, data such as allowable bending moment, shear force and normal force cannot be compared.

WARNING

Do not mix structural data from different standards without knowing their respective safety principle.

WARNING

Be cautious when using data of structures based on Load and Resistance Factor Design (LRFD) standards, such as Eurocodes or data based on Allowable Stress Design (ASD). A structural engineer can provide help.

Trusses and structures from assembled trusses shall always be checked for their structural stability and strength by a structural engineer. The provided technical specifications should never be exceeded.

WARNING

Do not use damaged or malfunctioning parts.

WARNING

Mark any damaged or worn material clearly and discard the material immediately.

2.1 Electrical safety

2.1.1 Electrical potential bonding

WARNING

ELECTRICAL HAZARD

Truss structures that are in contact with electrical equipment might develop dangerous touch voltages in the event of an electrical fault. Before energising any of the electrical equipment, the user must ensure that the truss structure is properly earthed. This applies to all modules made of electroconductive material that have equipment placed on or attached to them, or across wire and cable runs that, if damaged, could make electrical contact with metal parts.

It is extremely important to earth the truss structures because the audience and installers very often come into direct contact with the truss structures when the suspended fixtures are electrically charged.

2.2 Personal protection equipment

For health and safety reasons, people moving, assembling, disassembling, maintaining or transporting the product should wear adequate Personal Protection Equipment such as, but not limited to, gloves, sound protection, hard hats and safety shoes.

All people working with trusses should be instructed and informed about the correct usage and possible dangers before use.

WARNING

PERSONAL INJURY HAZARD

Always wear hard hats, safety shoes, sound protection, and protective gloves when moving, assembling, disassembling, maintaining or transporting the product.

WARNING

PERSONAL INJURY HAZARD

Follow your local noise level regulations when assembling and disassembling the product.

WARNING

PERSONAL INJURY HAZARD

Follow your local regulations of the maximum allowed weight per person when carrying or moving the product.

3 Limitations of use

The truss shall always be used within the limits of the structural report and the declarations provided.

All our trusses are calculated according to the Eurocode 9 (DIN-EN 1999) standard. Eurocodes are standards based on Load and Resistance Factor Design (LRFD).

WARNING

The structural data provided before 2015/2016 was based on the German DIN 4113 standard. As this standard had a different safety principle, the structural values cannot be compared.

NOTICE

TÜV certificates issued after February 2015 are all based on Eurocode 9.

MILOS trusses described in this manual are not specifically designed for lifting people. Adequate load reduction and safety precautions, according to local legislation, must be considered when people are lifted.

Use the product only for its prescribed purpose. Any use other than that mentioned is considered to be a case of misuse. The user or operator and not the manufacturer shall be liable for any damage or injury resulting from such cases of misuse.

3.1 Load charts

All truss loading calculations and TÜV certifications are based on the following:

- The self-weight is already taken into account
- Static loads only
- Single-span girders (all other structures made of trusses need dedicated structural reports)
- Loads applied in the node points
- Spans can be assembled of several modules
- The interaction of shear force and bending moment at the connector is considered
- Considered safety factors: self-weight 1.35 / variable load 1.5

3.2 Load reduction factor for repetitive use

To meet the BS 7905-2, ANSI E1.2-2006 and EN 17115 standards for truss modules in repetitive use, all loadings shall or should (depends on the standard) be multiplied by 0.85.

The truss calculations consider only static or virtual-static loads and no fatigue loads due to a high number of load cycles.

3.3 Compatibility with other products

Some products within our range fit with those of other brands. However, trusses can differ considerably depending on their design, layout and manufacture (for example, material properties, alloy, diameter, thickness or layout of the bracing or system tolerances).

We provide comprehensive technical support and structural data for all our truss modules. The structural integrity of an assembled structure of different brands and the legal compliance is the sole responsibility of the user. Their combined use must always be certified by a structural engineer case by case. MILOS cannot accept responsibility for products manufactured by third parties. Our design and quality assurance certifications are based on the latest European standards including EN-1999 and EN-1090, and they are at least equal to other truss manufacturer specifications within the EU and US markets.

3.4 Environmental influences

3.4.1 Temperature

Trusses can be used in environmental conditions varying from -20°C up to +80°C. However, take special care if trusses are used in temperatures below 0°C.

The open heel of the welds, and capillary action of pin holes, on some of our truss models can cause water intrusion inside the truss chords and diagonals.

In temperatures below 0°C, the captive water may freeze and cause damage to the truss members.

To avoid this situation, MILOS can provide the same trusses with drainage holes.

3.4.2 Aggressive environments

Take special care when trusses are used in aggressive environments or in the near vicinity. The aluminium alloys used in trusses might not be suitable for this environment.

Avoid direct contact with concrete by using a sealant.

The alloy used has good properties in a salt water environment, however, oxidation can occur on the surface. Clean regularly with fresh water or with a dedicated protection product.

The material used for the connectors is especially vulnerable to salt water. Anodise, coat or treat it with a sealant in such a way that no salt water particles can come in contact with the material.

4 Transport, handling and storage

WARNING

PERSONAL INJURY HAZARD

Always wear hard hats, safety shoes, sound protection, and protective gloves when moving, assembling, disassembling, maintaining or transporting the product.

CAUTION

PERSONAL INJURY HAZARD

Vertical transportation or storage of the product can be hazardous for reasons of falling.

Handle the product with care. Do not drop it or drag it around. Do not throw truss modules on top of each other. Prevent damage from sharp edges such as the forks of a forklift.

Dedicated dollies can be a highly effective means for transportation and storage, while providing large truss modules or sections with some extra protection.

Make sure the product cannot move or shake during transport. The abrasive motion of moving or shaking can lead to severe damage.

5 Identification

MILOS products can be recognised by identification stickers.

CAUTION

Make sure only MILOS original components are used. For more information, contact your distributor or the manufacturer.

NOTICE

There is always an identification sticker delivered with the product. Replace any missing identification stickers. Contact the manufacturer or its representative for information on the correct procedure.



Figure 2: Example of an identification sticker (without product info)

6 Technical specifications

For information on technical specifications, see *Part 2: Product-specific instructions*.

7 Load capacity

For information on load capacity, see *Part 2: Product-specific instructions*.

8 Approved accessories

For a complete overview of approved accessories, see our brochures or www.milossystems.com.

WARNING

By using excessive force when tightening accessories such as lamp hooks or cell clamps, you may cause damage to the truss chords.

CAUTION

Pay special attention when using lamp hooks or cell clamps. Their inside radius may not meet the tube they need to be attached to. This can lead to severe damage.

NOTICE

You should never allow accessories to damage other products.

9 Coatings and surface treatments

Coatings and surface finishes should only be applied after consulting with the coating or finish manufacturer or other party qualified to evaluate the possible effects of the coating or surface finish on the structural properties and load bearing capabilities of the truss.

Powder coating is only allowed with max. 180°C (356°F) for up to 20 minutes. If it's necessary to renew the powder coating, the process shall be coordinated with Milos.

Records should be kept detailing the application of any coating or surface finish, with particular attention to processes requiring the application of heat.

Chemical removal of coatings and surface finishes shall be carried out only after consulting with the chemical manufacturer to ensure that the chemical will not affect the mechanical properties of the aluminium.

Abrasive blasting should not be used, because it can cause loss of material.

10 Slinging methods

There are several methods for slinging truss. At all times, strength and stability must be guaranteed. However, the correct method depends on the application and other factors.

Based on loading a truss system to its maximum, you are advised to sling trusses according to the instructions provided. These methods do the following:

- Guarantee strength when attached in the node or directly next to the end brace
- Guarantee that the hanging point is above the truss's centre of gravity
- Minimise the horizontal compression of the main chords by choosing the correct slinging positions and steep bridle angles.

WARNING

Apply slinging solely to the main chords, not to the connections, diagonals or internal diagonals.

WARNING

Apply slinging to node points, aside end braces or aside horizontal cross braces.

NOTICE

Slinging equipment shall be made from non-abrasive and fire-retardant materials.

Use slinging devices that have a soft cover.

Direct contact between a steel wire rope and the truss chord should be avoided because of the abrasive surface of the steel wire rope.

For stability reasons, wrap at least 2 main chords.

Trusses can be suspended from either the top or bottom chords. The best method depends on the application.

NOTICE

Suspending and supporting have the same effect on the truss.

If the truss is not supported or loaded in the node point, the main chords will be subjected to an additional local bending moment. This effect should be considered in the structural analysis and could lead to reduction of the load capacity.

For a simple supported span at both ends, this might be less of a problem as the bending moment at the ends is almost zero.

In a multiple supported truss, the main chords at the mid-span supports are subjected to a bending moment and shear at the same time.

For optimum performance, suspensions should be attached to the node points. If not, the load capacity of the truss might be substantially reduced. Slinging to all main chords does not change this. The correct load can only be determined by studying each load case individually. This should be done by a structural engineer.

10.1 Recommended slinging methods

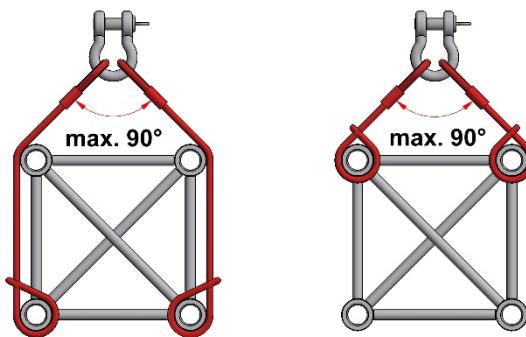


Figure 3: Slinging methods for MILOS Quatro and Rect trusses

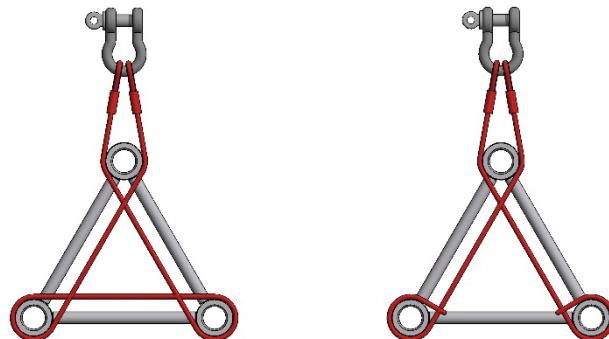


Figure 4: Slinging methods for MILOS Trio trusses

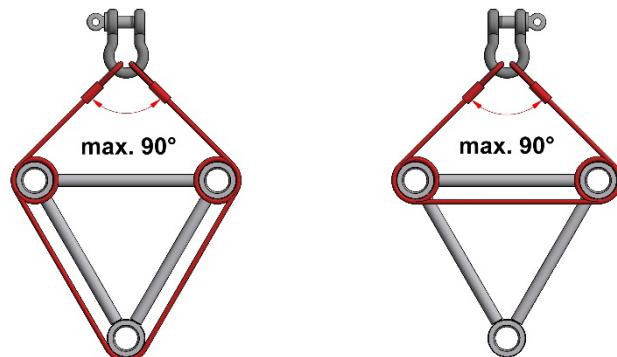


Figure 5: More slinging methods for MILOS Trio trusses

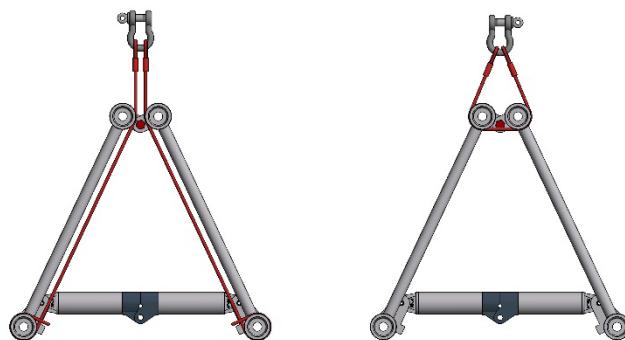


Figure 6: Slinging methods for triangular folding truss.

NOTE: the method on the right can only be used in combination with corner or sleeve blocks which stabilise the truss against tipping or rotating.

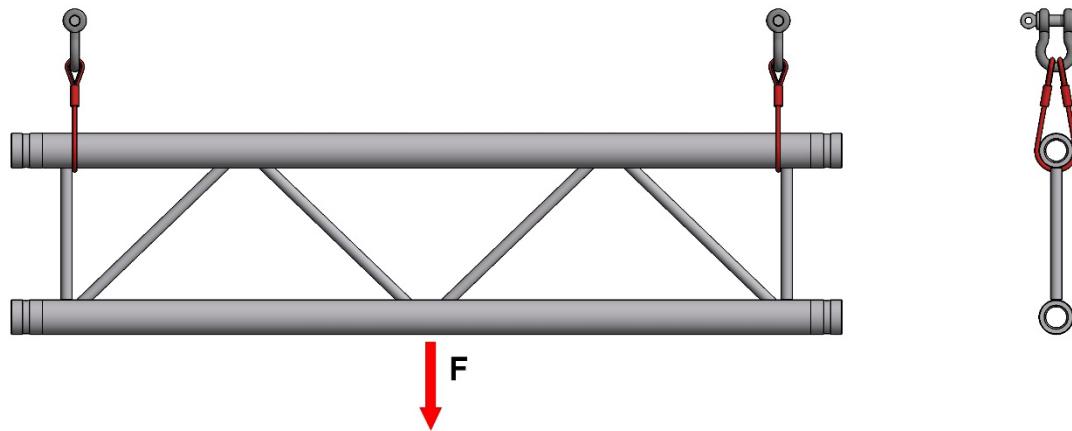


Figure 7: Duo truss pick-up

NOTE: Duo truss pick-up should only be done from the top chord.

! CAUTION

Duo trusses, ladder trusses and two-chord trusses need very special attention when slinging. The top chord must be stabilized because of risk of lateral torsional buckling. Only load the bottom chord. Other types of loading need structural analysis before use.

11 Assembly and disassembly

11.1 Safety when assembling and disassembling

A competent person or sufficiently instructed personnel under the supervision of a competent person, should always assemble the product.

Before assembly, use, and disassembly, the competent person is responsible for, but not limited to:

- Carrying out all the instructions as described in this manual and in the specific instructions of the applicable truss product.
- Instructing the people doing the assembly and ensuring that all trusses and loads are suspended correctly.

You are strongly advised to show people carrying out the assembly or disassembly how to physically assemble and disassemble trusses, how to orientate connections and which tools to use.

11.2 Before you start

With trusses that have conical connections, you can only place the pin from the outside inwards. Make sure that the conical hole in the connection is correctly placed, in other words, that the larger side of the hole faces outwards.

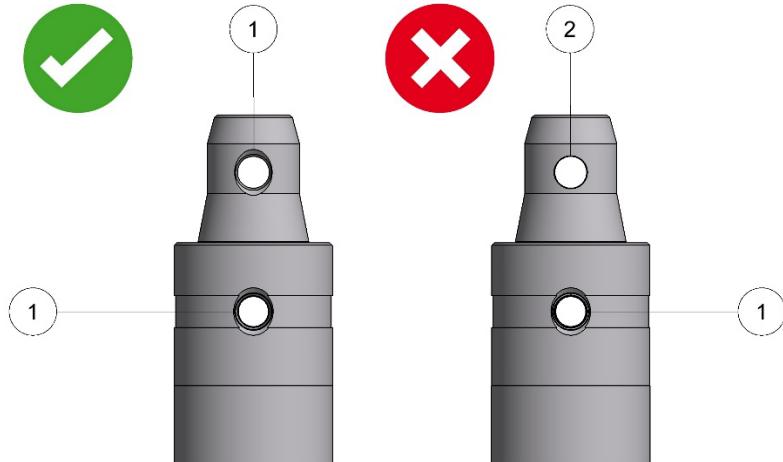


Figure 8: Holes in conical connections

1	Large hole
2	Small hole

When two trusses with conical connectors are assembled, you can see a gap between them. This is done on purpose and has no negative influence on strength and function.

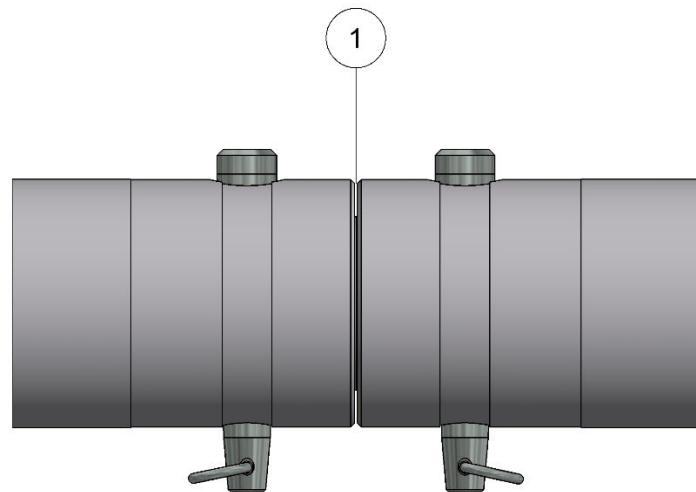


Figure 9: A gap between trusses assembled with a conical connection

1 Gap

When trusses with end braces are being assembled, it does not have any significance if the diagonals follow the alternating zigzag pattern.

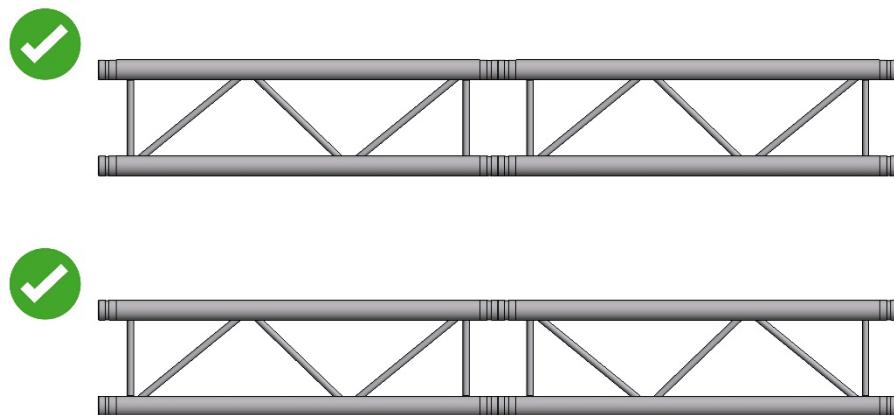


Figure 10: For trusses with end braces, both zigzag patterns can be used.

11.3 Required tools

- Torque wrench
- Copper hammer

11.4 Torque

Use a torque wrench to tighten all bolts and nuts under tension. When bolts are connected with threaded aluminium components, use the following torque settings:


- M12: 15 Nm
- M16: 25 Nm

11.5 Assembling a truss


1. Slide both truss modules towards each other.
2. Align the pin holes of the female and male connectors. Adjust the male connectors, in case the holes are not aligned. Do not use excessive force.
3. Assembling the truss pin
 - a. when using a pin with an R-clip:
Insert the pin through the pin holes, preferably with a copper hammer. Tip: Place the pin in such a way that the hole for the R-clip is perpendicular to the length of the truss. This makes it easy for you to mount the R-clip.
Secure the pin with the R-clip.
 - b. when using a pin with thread and nut:
Insert the pin through the pin holes, preferably with a copper hammer and deep enough, so that it won't be necessary to pull in the pin by means of the nut. Slide the rubber washer and washer onto the pin and fix the nut.
(See chapter 1.4, figure 1 "BM8 connection"). Use self-locking nuts only.
4. Sling the truss as instructed in Chapter 10.
5. Check that all connections are made properly.
6. Attach loads as instructed in Chapter 11.7.
7. Lift the truss to working height and inspect all the connections. Correct if necessary.
8. Lift the truss to the required height. When lifting, avoid "bumping", as it will lead to increased forces in the truss and load.

11.6 Assembly instructions for truss circles

1. Start with assembling two or more truss modules together to create two half circles.
2. Assemble the truss pins in both half circles as described in chapter 11.5.
Note: To achieve a certain flexibility to react to connectors that are not perfectly aligned, it is recommended not to hammer the truss pins in tightly yet, but to insert them loosely into the pin holes.
3. Slide the half circles together and connect them to a full circle.
4. After all junction points are connected, hammer the pins to final tight position.

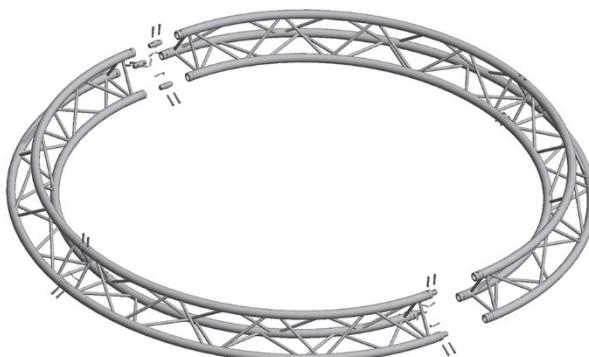

Connecting of two half circles

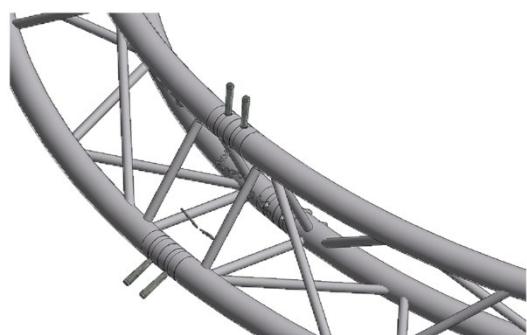

Loose connection

11.7 Attaching a load

WARNING

Before applying loads, a competent person should check if all trusses are connected properly.

Make sure loads are equally divided over both bottom and top chords. Loading a truss on one side leads to internal torsional forces which are not considered in the loading data provided.

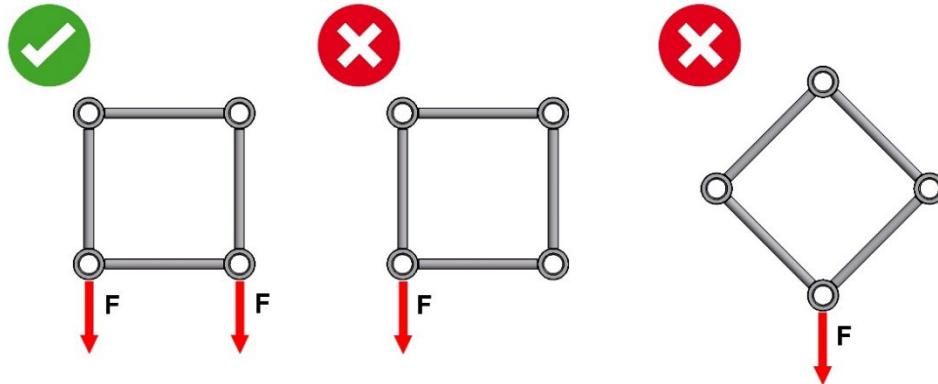


Figure 11: Attaching loads to a MILOS Quattro truss

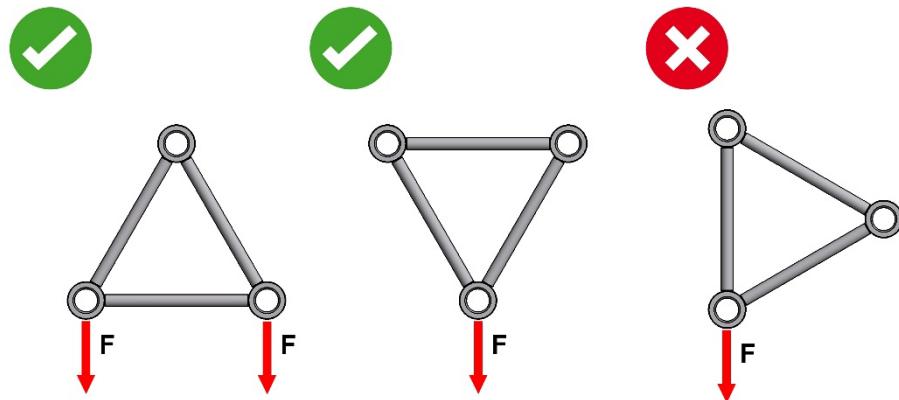


Figure 12: Attaching loads to a MILOS Trio truss

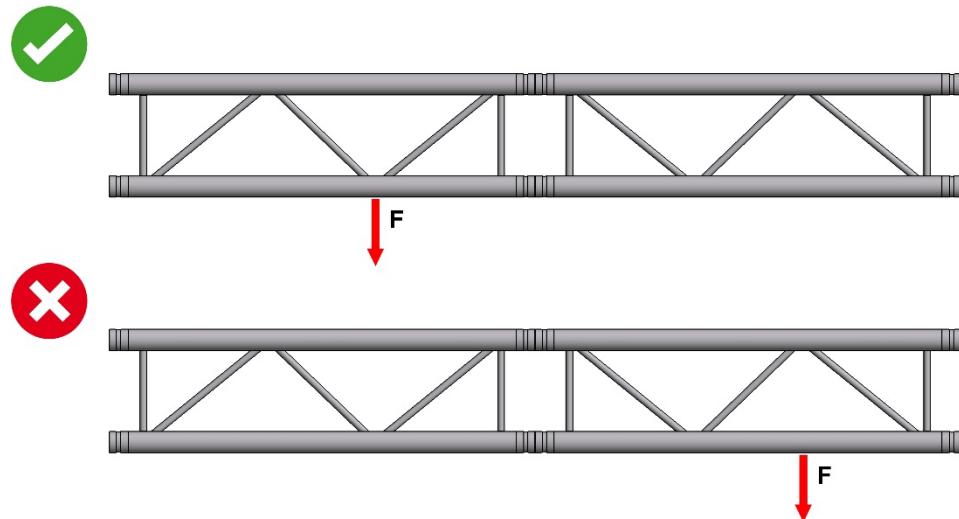


Figure 13: Attach the load as close to a node point as possible

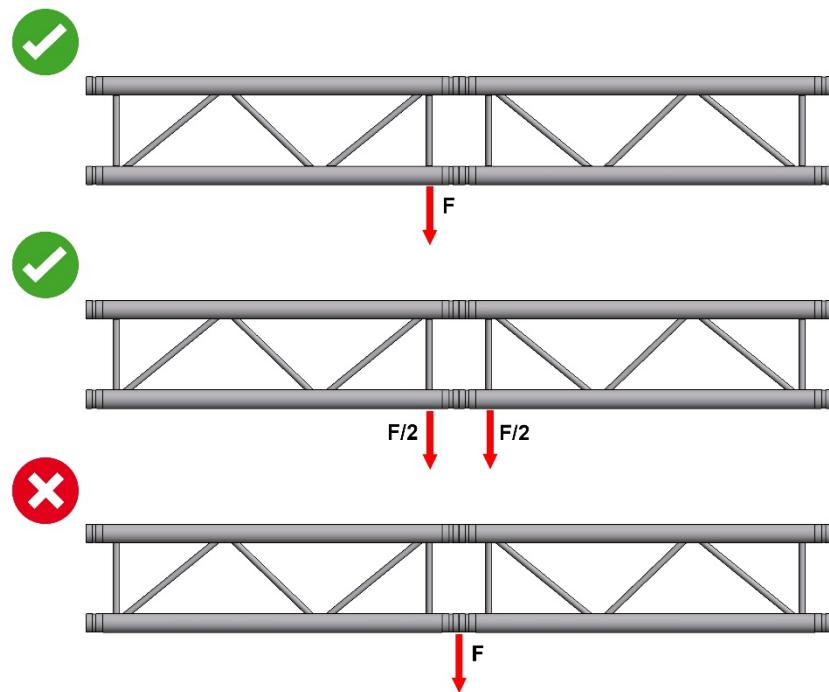


Figure 14: Attaching loads near the connection

NOTE: It may be possible to use some of denied methods, but only after consulting a structural engineer.

11.8 Disassembling a truss

1. Lower the truss to working height.
2. Detach the loads.
3. Inspect the truss for any damage. Mark the truss accordingly and discard it, if necessary.
4. Lower the truss to the floor level.
5. Disconnect the slings or lifting accessories.
6. Remove the truss pins /clevis pins.
7. Hit the pins firmly to remove them.
8. Inspect the components for damage. Mark the components accordingly and discard them, if necessary.

12 Maintenance

Although aluminium may not develop corrosion the way many steel alloys do, ambient influences can have a corrosive impact on aluminium. Take special care with trusses that are placed outdoors for an extended period of time, especially in areas with a high level of industrial pollution, near salt water, near tram lines or near swimming pools. Trusses should be individually inspected before each use to find out if the expected pollution has had a corrosive effect.

Repairs should be carried out and warranted by either the manufacturer or a suitably qualified person approved by the manufacturer.

WARNING

Do not repair the product without first consulting the manufacturer.

Smooth the surface of coupling parts regularly. Use fine sandpaper or conventional abrasive materials.

Keep the coupling parts slightly lubricated with oil, silicone spray or similar lubrication. Lubricants should not be sticky, to avoid gathering dirt, dust or small debris.

Avoid painting the inner surface of the connection and pin holes. This has a negative effect on the fit.

Remove any kind of debris and dirt from truss and its components. Do not use any abrasive methods other than an abrasive cloth or sand paper grain 240 or higher.

13 Inspection

Depending on local regulations, we recommend that either a competent person or a certified body carries out a careful, documented inspection at least once a year or as often as required by the circumstances or the intensity of use..

WARNING

Perform the inspections as instructed in chapter 14 to ensure the safe use of the product.

In case of an accident, misuse or malfunction, the product should be marked, discarded and inspected by a qualified person to establish its structural integrity for re-use. The product should be identified accordingly, and records of identification numbers and photos should be kept.

WARNING

Do not use damaged trusses, connections or pins.

Responsibility and liability for the safe use of the product lies predominantly with the user.

The open heel in the bracing welds in the M290 and M390 series are part of the design and TÜV approved.

For information on the discard criteria, see Chapter 14.

13.1 Inspection levels

13.1.1 Regular inspection

A competent person shall visually perform regular inspections prior to each use. You do not have to keep records. The regular inspection includes a visual inspection for signs of external damage and wear. If any damage is detected during the visual inspection, a qualified person shall carry out a detailed inspection based on the criteria described in Chapter 14.

13.1.2 Periodic inspections

A qualified person shall perform periodic visual inspections on behalf of the user in accordance with Chapter 14, and a record of the inspections shall be maintained.

13.2 Inspection frequency

13.2.1 Initial inspection

When first acquired, whether new or used, inspect the product as instructed in Chapter 14. Keep a record of the inspections and identification numbers.

13.2.2 Inspections after accident, incident or malfunction

If the truss modules were subjected to any accidents, inspect the modules as instructed in Chapter 14.

Examples of accidents, incidents or malfunctions are:

- Dropping a truss on the floor from a height
- Lifting a truss with pins missing in joints, which might cause overloading
- Subjecting a truss to shock loads
- Tightening a truss during lifting

13.2.3 Truss in regular and non-regular service

Perform regular inspections prior to every use, or, when not in use for a period of one month or more, and periodic inspections at least once a year.

13.2.4 Permanent installations (stationary)

Perform periodic inspections on all truss modules permanently installed in a stationary configuration. A qualified person shall determine the frequency of inspections based on the prevalent conditions.

13.2.5 Permanent installations (moving)

Perform periodic inspections on all truss modules permanently installed in a configuration where movement of the truss is an integral part of use. Periodic inspections shall be carried out every three months, or in accordance with an inspection routine established by a qualified person.

13.3 Records

The owner shall keep records of initial and periodic inspections for each truss, which should be signed and dated by the person carrying out the inspections.

Please see sample of inspection report at the end of this document.

14 Discard criteria

All the discard criteria must be considered when doing the inspection.

In addition to the normal requirements related to use, professional assembly and disassembly, transportation and storage of the product, regular inspections are vital. Carefully inspect each individual module visually before each use, regardless of the respective field of use.

For information on the required frequency of inspections, see Chapter 13.2.

If any damage is noted during an inspection of the product that precludes further safe use, the product must be discarded and disposed of. In most cases, it is not enough to just identify the damage.

Disposal through the manufacturer, supplier or a metal recycling company is the only safe way of protecting others from risks associated by damaged material.

Due to fabrication, the truss can have some dimensional deviation from the theoretical dimensions provided. These deviations are within the limits given in EN 1090-3.

14.1 Overview of discard criteria

Inspection	Failure symptoms		
Geometry	Bending	Twisting	
Main chords	Breaks, cracks	Bending	Deformations that do not allow easy assembly
Diagonals, end braces	Breaks, cracks	Missing	Bending
Connections	Cracks in welds	Deformations that do not allow easy assembly	Corrosion
Connecting hardware	Pressure area on pin or bolt	Bending	Deformation on R-clip hole

14.2 General criteria

WARNING

If any part of the product shows significant visible damage or is suspected of containing a damaged module, visible or not, the product must be discarded and marked accordingly. A qualified person should assess the product.

WARNING

If in doubt when assessing individual damages, contact the manufacturer, supplier or a qualified person.

WARNING

Mark any damaged or worn material clearly and discard the material immediately.

Part	Failure symptoms
Truss	Welds which have cracks or other irregularities. Note that the incomplete welding seams around the diagonal braces are production-related and their stability has been TÜV approved.
Truss	Excessive corrosion whereby the total cross-sectional area of the truss is reduced by more than 25% of the thickness or more than 10% of the cross-sectional area of the component.

14.3 Geometry of the truss

If any part of the product shows any of the following damages, the product is unfit for further use and must be discarded.

Part	Failure symptoms
Truss	The lasting deformation of the truss by twisting is more than 0.15° per meter of the truss length. Check the twisting with a digital leveller. The angular difference between the measurements at the both ends of the truss, divided by the length of the truss, shall not exceed 0.15°.
Truss	The lasting deformation of the truss by bending exceeds the following limits: Max. Δ = 3 mm (0.12 in) if $L < 2250$ mm (7.38 ft) Max. Δ = $L/750$ (length divided by 750) if $L > 2250$ mm (7.38 ft) See Figure 15.

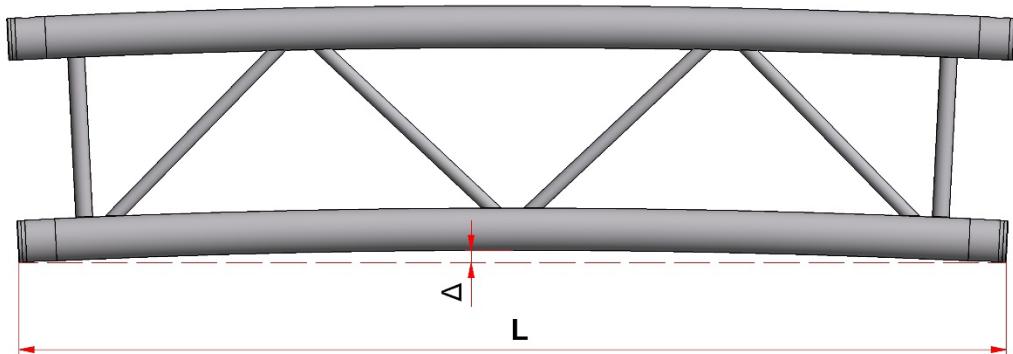


Figure 15: Limits for the lasting deformation of the truss by bending

14.4 Main chords

If any part of the product shows any of the following damages, the product is unfit for further use and must be discarded.

Part	Failure symptoms
Main chord	Breaks or cracks in the main chord.
Main chord	The main chord is bent more than 3 mm (0.12 in) between two node points. See Figure 16.
Main chord	The end of the main chord or connection is deformed to such an extent that the truss can only be connected to another truss by using considerable force.
Main chord	Scratches or signs of attrition on the surface of the main extrusions that reduce the wall thickness by more than 25% or the cross-sectional area of the tube by more than 10%.
Main chord	Indentation/dent deeper than the wall thickness.
Main chord	Holes appearing in the main chord after the truss was taken into use.
Main chord	The deformation of the main chord to an oval shape by more than 5% of the respective diameter.
Main chord	The main tube is distorted or constricted next to the welds due to excessive tensile force.
Main chord	Corrosion causing loss of material.

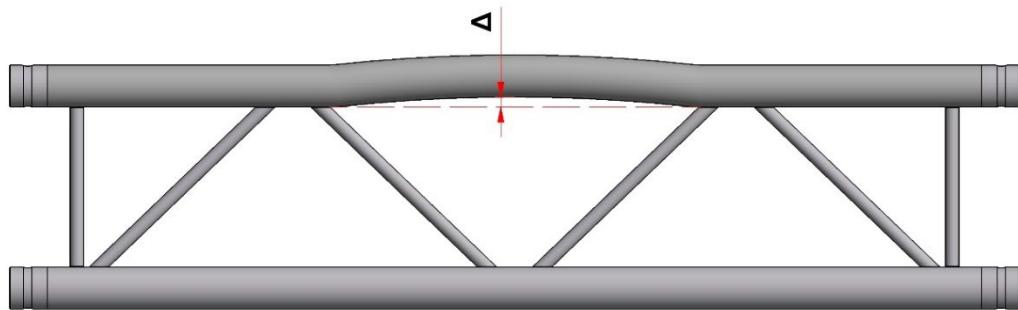


Figure 16: Main chord bent between two node points

14.5 Diagonals and end braces

If any part of the product shows any of the following damages, the product is unfit for further use and must be discarded. The term "brace" refers to a diagonal brace or an end brace.

Part	Failure symptoms
Braces	Breaks or cracks in a brace.
Braces	A brace no longer exists.
Braces	A brace is displaced from the original centre line by $L/300$ (length divided by 300) or 3 mm (0.12 in), whichever has the smallest value. See Figure 17.
Braces	Scratches, indentations or signs of attrition on the surface of the section that reduce the wall thickness by more than 25% or the cross-sectional area of the tube by more than 10%.
Braces	Indentation/dent deeper than the wall thickness.
Braces	Holes appearing in the brace after the truss was taken into use.
Braces	A brace shows a deformation to an oval shape by more than 5% of the respective diameter.
Braces	Corrosion causing loss of material.

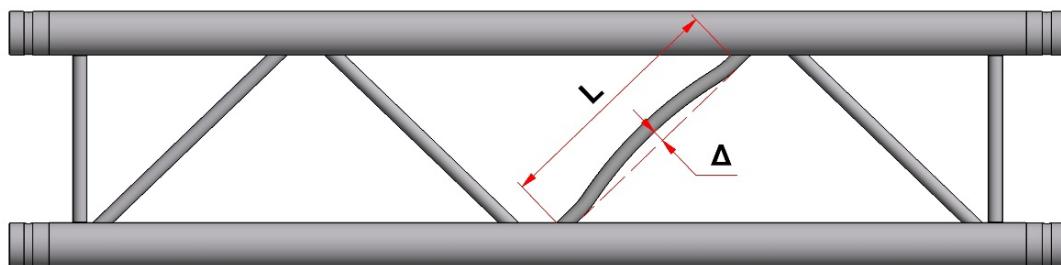


Figure 17: Bent diagonal

14.6 Connectors

If any part of the product shows any of the following damages, the product is unfit for further use and must be discarded.

Part	Failure symptoms
Connectors	Cracked or partially broken welding seams between the main tube and the connector.
Connectors	Oval signs of wear in the pin hole greater than 10% of their respective diameter. See Figure 18.
Connectors	Any visible ovalisation of pin holes due to overload.
Connectors	If a connector is deformed to such an extent that the truss can only be connected to another module by using considerable force.
Connectors	Corrosion causing loss of material.
Connectors	Scratches, cuts or hammer stroke indentations on the connector to a depth of more than 2 mm (0.08 in) and that are longer than 10 mm (0.39 in), regardless of the direction.

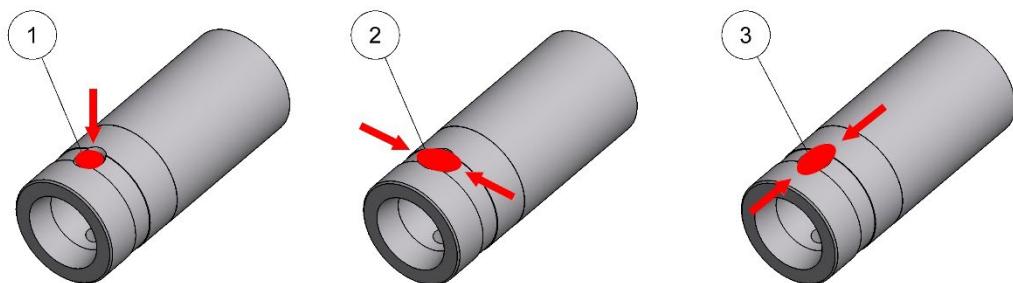


Figure 18: Conical connections.

- 1 Normal conical drill
- 2 Oval signs of wear in the pin hole
- 3 Oval signs of wear in the pin hole

14.7 Connecting hardware

Connecting hardware is subjected to wear when inserted and removed frequently, especially due to hammer strokes. Connecting hardware can be regarded as consumables.

WARNING

Do not re-zinc plate steel pins, as they are made of high-grade steel. Re-zincing may cause hydrogen embrittlement.

If the connecting hardware shows any of the following damages, replace the connecting hardware in question.

Part	Failure symptoms
Connecting hardware	Signs of galvanic corrosion.
Pin or bolt	Signs of pressure areas on the pin or bolt.
Pin or bolt	A bent pin or bolt.
Pin	Any damage to the smooth surface of the pin.
Pin	Burrs, mushroom heads or other protruding, sharp or pointed edges at the narrower end of the pin. See Figure 19.
R-clip hole	Deformations on the R-clip hole make it impossible to fit the R-clip.
Self-locking nut	A re-used self-locking nut. Self-locking nuts are for single use only.



Figure 19: Mushroom head on the pin

15 Warranty

For a period of 24 months, we undertake to repair, free of charge, any damage attributable to faulty materials or workmanship, provided that the product is forwarded, freight paid, to our factory or one of our contract service organisations.

The warranty period begins on the day of delivery, proven by a purchase receipt like an invoice, delivery note or their copies.

The warranty only is applicable for new products.

The warranty does not cover damage due to transport damage, negligent handling, overload or parts subject to normal wear and tear. Nor damages that originate from a case of misuse because of non-observance of the instructions in this manual.

The fitting of replacement parts not supplied by us, or modifications of our design by third parties, also invalidates the warranty.

Warranty repairs do not renew nor extend the warranty period.

16 Certificates

16.1 CE Declaration of Conformity



CE-DECLARATION OF CONFORMITY (according to Machinery Directive 2006/42/EC annex II)

Milos s.r.o.
Spindlerova 286
413 01 Roudnice nad Labem
Czech Republic

Herewith declares that:

Milos Truss Range:

M220, M222, M290, M390, M400, M520, M760, M950, 4GS-35, 4GS-50, 4GS-62, 4GX-91, K-40

- are in compliance with the Machinery Directive 2000/6/EC annex II
- the following harmonized standards have been applied (or parts/clauses of):
DIN EN 1993-1, DIN EN 1999-1, DIN EN 1999-1/A2, EN 1090-1, EN 1090-3, EN 12020-1/2,
EN ISO 3834-3, EN ISO 12100-1, EN 754, EN 755, EN 515, EN 573, EN 10204:2004

Roudnice nad Labem, Czech Republic, 2019-07-04

Mr. Frantisek Zýkan
CEO



16.2 CE Declaration of Performance



PROHLÁŠENÍ O VLASTNOSTECH / Declaration of Performance

č. 1/2017

1. Jedinečný identifikační kód typu výrobku/ Unique identification code of the product-type:

M290, M390, M400, M520, M760, M950, 4GS-35, 4GS-50, 4GS-62, 4GX-91, K-40

2. Zamýšlená(é) použití/ Intended use/es:

Příhradová konstrukce v souladu s EN 1090-3:2008. / Truss structure in accordance with EN 1090-3:2008.

3. Výrobce / Manufacturer:

MILOS s.r.o., Špindlerova třída 286, CZ – 413 01 Roudnice nad Labem

5. Systém(y) POSV/ System(s) of AVCP: **2+**

6a. Harmonizovaná norma / Harmonised standard: **EN 1090-1:2009+A1:2011**

Oznámený(é) subjekt(y) / Notified body: **TÜV NORD Systems GmbH & Co. KG – 0045**

7. Deklarovaná(é) vlastnost(i) / Declared performance(s):

Základní charakteristiky / Essential characteristic	Vlastnost / Performance	Harmonizované technické specifikace / Harmonised technical specification
Svařitelnost / Weldability	EN AW 6082	EN 1011-4:2000
Křehký lom / Fragile quarry	NPD	NPD
Reakce na oheň / Reaction to fire	Třída A1/ Class A1	EN 13501-1:2007+A1:2009

Vlastnosti výše uvedeného výrobku jsou ve shodě se souborem deklarovaných vlastností. Toto prohlášení o vlastnostech se v souladu s nařízením (EU) č. 305/2011 vydává na výhradní odpovědnost výrobce uvedeného výše. / The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Podepsáno za výrobce a jeho jménem / Signed for and on behalf of the manufacturer by :
Ing. Vladimír Zeman, IWE; Vedoucí WPK // Head FPC

V / Place: **Roudnice nad Labem,**

Dne / Date: **01.01.2017**

Podpis / Sign



13-933
Ing. Vladimír ZEMAN



PROHLÁŠENÍ O VLASTNOSTECH / Declaration of Performance

č. 2/2014

1. Jedinečný identifikační kód typu výrobku / Unique identification code of the product-type:

M222, M227, M254

2. Zamýšlená(e) použití / Intended use/es:

Příhradová konstrukce v souladu s EN 1090-3:2008. / Truss structure in accordance with EN 1090-3:2008.

3. Výrobce / Manufacturer:

Milos s.r.o., Špindlerova třída 286, CZ – 413 01 Roudnice nad Labem

5. Systém(y) POSV/ Systém(s) of AVCP: **2+**

6a. Harmonizovaná norma / Harmonised standard: **EN 1090-1:2009+A1:2011**

Oznámený(e) subjekt(y)/ Notified body: **TÜV NORD Systems GmbH & Co. KG – 0045**

7. Deklarovaná(e) vlastnost(i) / Declared performance(s):


Základní charakteristiky / Essential characteristic	Vlastnost / Performance	Harmonizované technické specifikace / Harmonised technical specification
Svafitelnost / Weldability	EN AW 6060	EN 1011-4:2000
Křehký lom / Fragile quarry	NPD	NPD
Reakce na oheň / Reaction to fire	Třída A1/ Class A1	EN 13501-1:2007+A1:2009

Vlastnosti výše uvedeného výrobku jsou ve shodě se souborem deklarovaných vlastností. Toto prohlášení o vlastnostech se v souladu s nařízením (EU) č. 305/2011 vydává na výhradní odpovědnost výrobce uvedeného výše. / The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Podepsáno za výrobce a jeho jménem / Signed for and on behalf of the manufacturer by :
Ing. Vladimír Zeman, IWE; Vedoucí WPK / Head FPC

V / Place: **Roudnice nad Labem,** Dne / Date: **01.06.2019**

Podpis / Sign



CE

0045

MILOS s.r.o.

Špindlerova třída 286

CZ – 413 01 Roudnice nad Labem

14

Ref.-Nr. 1/2014

EN 1090-3:2008

Příhradová konstrukce / Truss

M290, M390, M400, M520, M760, M950, 4GS-35, 4GS-50, 4GS-62, 4GX-91, K-40

Poznámky / Notice:

CE

MILOS s.r.o.

14

EN 1090-3:2008

Špindlerova třída 286

Not. St. 0045

CZ – 413 01 Roudnice nad Labem

Ref.-Nr.: 1/2014

M290, M390, M400, M520, M760, M950, 4GS-35, 4GS-50, 4GS-62, 4GX-91, K-40

13-933
Ing. Vladimír ŽELAKA
1.1.2014 

CE

0045

MILOS s.r.o.

Špindlerova třída 286

CZ – 413 01 Roudnice nad Labem

14

Ref.-Nr. 2/2014

EN 1090-3:2008

Příhradová konstrukce / Truss

M222, M227, M254

Poznámky/ Notice:

CE

MILOS s.r.o.

14

EN 1090-3:2008

Špindlerova třída 286

Not. St. 0045

CZ – 413 01 Roudnice nad Labem

Ref.-Nr.: 2/2014

M222, M227, M254

1.6.18 *[Signature]* 13-933
Ing. Vladimír ZEMÁK

Truss inspection documentation

Inspection date _____

Inspector _____

Reason for the inspection

- First purchase
- Inspection after accident, incident or malfunction
- Periodic inspection

Truss system _____

Type of component _____

Serial number _____

Overview of criteria to be checked for discard

(in accordance with the MILOS Truss User Manual Part 1: General instructions)

		A	B	C	D	E	F	G
1	Identification sticker	Sticker is missing						
2	Global geometry	Bending	Not easy to connect	Torsion				
3	Main chords	Breaks / Cracks	Bending	Not easy to connect	Corrosion	Scratches, Indentations, Abrasions	Ovalisation	Distortion, constriction
4	Diagonals / End frames	Breaks / Cracks	Not existing	Bending	Corrosion	Scratches, Indentations, Abrasions	Ovalisation	
5	Connector	Not easy to connect	Corrosion	Scratches, Indentations, Abrasions	Oval signs of wear in pin hole	Ovalization of pin hole due to overload		

Legend	Failure mode does not exist	Failure mode exists
		

If failure mode present:

Cell number	Description of failure mode

Should the component be discarded? Yes No

Contact details:

Area Four Industries Česko s.r.o.
Spindlerova 286
413 01 Roudnice nad Labem
Czech Republic
T +420 416 810 800
info@milos.cz